

CANVAS FIRE RATED

The surface is made of polyurethane layer fiber cloth, which has been tested for high temperature resistance for thousands of times.

- The accessories of this product are tightly combined, with good air tightness and oxidation resistance this product has good plasticity, can be folded into the desired
- temperature 250°C.



Construction


- Frame & inner: Sheet iron + PVC Flame retardant polyester cloth.

Surface Finish


- Gavanize and antioxidant treatment.

Material thickness

- Algam: (Metal): 0.5mm / cloth: 0.45mm (PVC gray)
- Algam: (Metal): 0.5mm / cloth: 0.45mm (Fiberglass grey)
- Algam: 0.5mm / cloth: 0.45mm (Silica red).

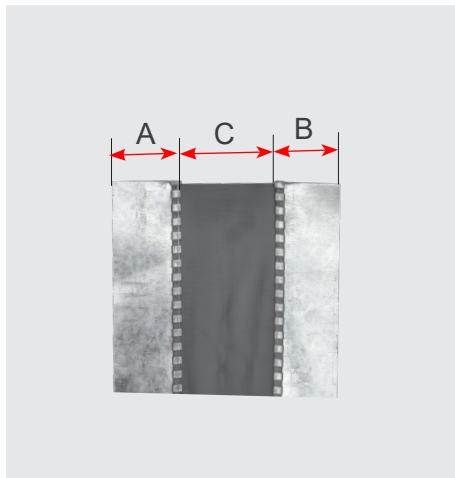

Drawing

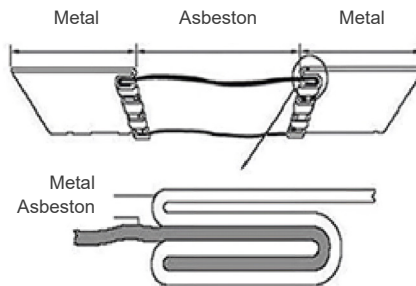

SPECIFICATION

	First algam length (A)	Cloth length (C)	Second algam length (B)	Roll
Specification	45mm	60mm	45mm	L =25m
	45mm	100mm	45mm	L =25m